


BRUTE AIR-ROTARY

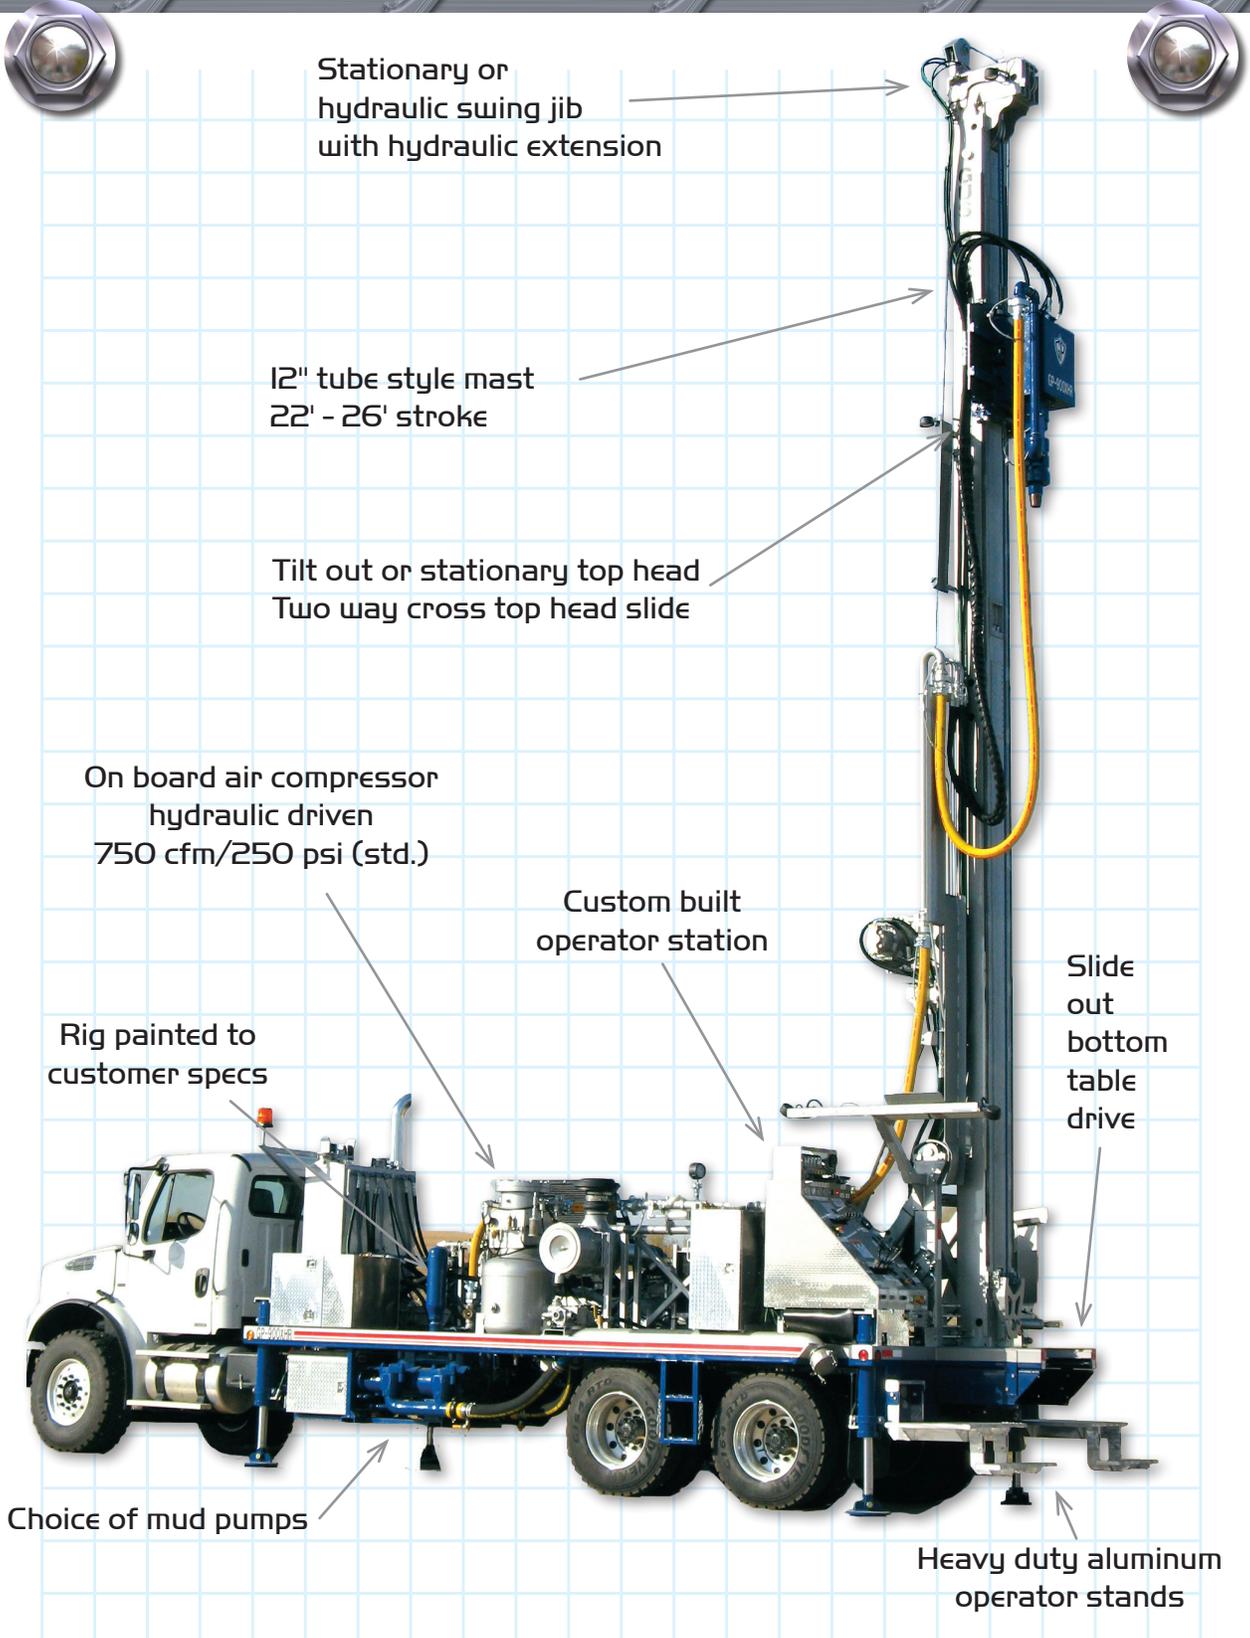

Stationary or hydraulic swing jib with hydraulic extension

12" tube style mast 22' - 26' stroke

Tilt out or stationary top head Two way cross top head slide

On board air compressor hydraulic driven 750 cfm/250 psi (std.)

Custom built operator station

Slide out bottom table drive

Rig painted to customer specs

Choice of mud pumps

Heavy duty aluminum operator stands

(Customizing & other options obtainable.)



1480 Lincoln Street SW
 PO Box 96 • Le Mars, Iowa 51031
 712.546.4145 • 800.383.7324
 Fax: 712.546.8945
 guspech@guspech.com

MODEL	STROKE	SPEED	TORQUE	PULLDOWN	PULLBACK	MAST
GP-900XR	22 ft - 26 ft	107-200 rpm	9,000 ft lbs	18,412 lbs	24,537 lbs	50,000 lbs
GP-1100XR	22 ft - 26 ft	88-160 rpm	11,000 ft lbs	18,412 lbs	24,537 lbs	50,000 lbs
GP-1300XR	22 ft - 26 ft	65-145 rpm	13,000 ft lbs	18,412 lbs	24,537 lbs	50,000 lbs
GP-1900XR	22 ft - 26 ft	45-120 rpm	19,000 ft lbs	18,412 lbs	24,537 lbs	50,000 lbs
GP-XHR Series increased pulldown and pullback				32,637 lbs	40,000 lbs	50,000 lbs

FEATURES

- 750 cfm/250 psi air compressor (Std)
- 12" tube mast
- Cross head slide
- Feed control system
- Hydrostatic/planetary top head drive
- Single station control console
- Two-speed winches
- Hydraulic outrigger system
- Aluminum operator stands
- Transfer case from truck engine or diesel power unit
- Retractable drill stem (auger) clamp/guide table with removable guide
- Two-speed, cable, hydraulic cylinder operated pulldown/pullback drill system



OPTIONS

- Dual motor-spindle top head
- Two speed hollow spindle top head, single control operated
- Tilt head carriage
- Bottom table drive
- Hydraulic swing jib (single or double)
- Hydraulic slide base
- Angle drilling system
- Choice of development air compressor
- Line oiler
- Piston or centrifugal mud pump
- Water/air swivel with hosing
- Hydraulic powered water/foam injection pump
- Mud pit system
- Casing hammer attachment
- Break out wrench
- Rod spinner
- Wire line winches
- Carousel or rod box tooling rack
- Tool boxes
- Cat head pedestal
- Positive kill emergency shut down for methane applications



Top and Bottom Drive



750 cfm/250 psi
air compressor (Standard)



Double Swing Jib

Tandem axle truck, trailer, skid, or track mounted • Customizing obtainable